

●Technical data


Supply terminals	N,L
Rated supply voltage	AC 220V ; DC 80-300V
Rated frequency	40/50/60/70Hz
> U setting range	AC130-300V ; DC130-300V
< U setting range	AC80-210V ; DC80-210V
Voltage hysteresis	5V
Overvoltage trip delay	0.5s
Voltage accuracy	<1%
Max. operating phase voltage	350V
Max. operating current	40A/63A
Altitude	≤2000m
Ambient temperature	-25℃~+50℃
Permissable relative humidity	≤50% at 40℃ (without condensation)
Storage temperature	-25℃~+55℃
Size	85*36*66mm

●Front-face panel

>V: Overvoltage Indicator
<V: Underage Voltage
>A: Overcurrent Indicator
POWER : Normal Working Indicator

M Menu selection
▲ Digit+
▼ Digit-
⏻ ON/OFF

●Wiring diagram/Dimensional Drawing

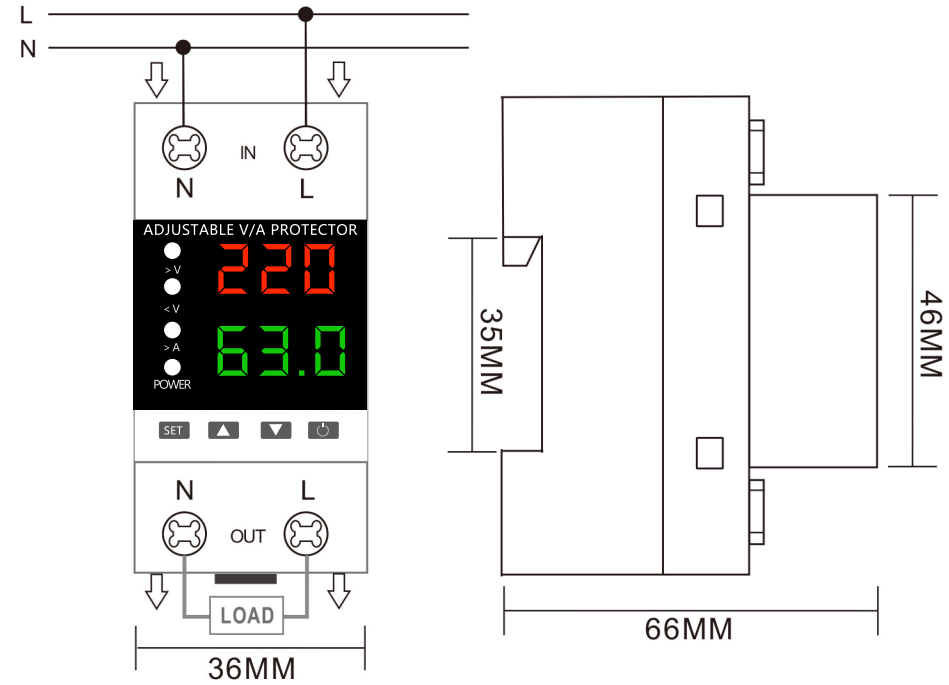

●Setup menu

